

MC-WU5505

3LCD Projector



Introducing our innovative multi-purpose 3LCD MC-WU5505 projector which combines all our technical expertise with our market leading knowledge.

This model can produce 5200 ANSI, has a 16,000:1 contrast ratio and a resolution of 1920 x 1200.

So whether you are on the move or in an office, our MC-WU5505 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

WUXGA 1920 x 1200 resolution

5200 ANSI lumens/Colour light output

16,000:1 contrast ratio

Images up to 300" diagonal

Lens shift, HDMI out

Built In edge blending and warping

Filter life 10,000 hours


3 year / 6 month warranty*

Please note: Content, technical specifications and images are subject to change. *For education and extended warranties please contact your local dealer.

MC-WU5505 3LCD Projector

Technical Specifications

Panel Size	3LCD 17mm (0.67")	On Screen Display Languages English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
Panel Structure	3LCD	
Resolution	WUXGA (1920 x 1200)	
Light Output (Brightness) ANSI Lumens	5200 (Normal), 3640 (Eco)	
Contrast Ratio	16,000:1	
Lamp Life (Hours)	4000 (Normal), 6000 (Eco)	
Lens	Built-in	
Number of Colours	16.7 million colours	
Lens Zoom	Manual Zoom x 1.7	
Lens Shift	Manual	
Lens Focus	Manual Focus	
Lens Shift	Manual, Vertical 0 – +50%; Horizontal +/-4.4%	
Projection Lens F Number	19.8 – 33.9	
Focus Distance	0.8 – 15.2m	
Distance to Width Ratio / Throw Ratio (:1)	1.4 (Wide), 2.3 (Tele)	
Diagonal Display Size	30 – 300"	
Speakers	16W mono	
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°	
Picture Modes	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim.	
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Magnify, Mirror reverse image, Up-side down image	
Operating Features	Accentualizer technology, Cloning function, DICOM simulation, Edge blending, HDCR (High Dynamic Contrast Range), Image Optimiser, Instant stack, Picture Shift, PbyP, PinP, Warping	
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adaptor), Displaying text data transferred via network, Extron XTP system, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie), PJLink™, Projector Management via SNMP	
Security Features	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)	
Digital Input	HDMI x 2, HDBaseT x 1	
Analogue Input	15 pin Mini D-Sub x 2, RCA Jack x 1	
Video Output	15 pin Mini D-Sub x 1, HDMI x 1 (Supporting HDCP decoding)	
Audio Input	3.5mm Stereo Mini Jack x1, RCA Jack (L/R) x 1	
Audio Output	3.5mm Stereo Mini Jack x 1	
RS-232C Control	1 x 9-pin D-Sub	
Wireless LAN	USB-WL-11N wireless adaptor (optional)	
Wired LAN	RJ45 connector x 1	
USB Type A	USB Type A x 1 (wireless adaptor)	
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)	
Operating Power Consumption	420W	
Standby Power Consumption	Less than 0.5W	
Weight	6.8kg	
Dimensions (W x H x D)	460 x 138 x 334mm	
Noise (Normal)	38dB (Normal), 29dB (Eco)	
Filter Life (Hours)	10,000 Hours	
Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant	
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"	
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)	
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (1.8m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Cover x1 Adapter Cover x1, Terminal Cover x1, HDMI Cable Holder x3, Cable Tie (large x1, medium x3), Hook Metal x1, Screw x1	
Optional Accessories	USB wireless adaptor USB-WL-11N, Installation remote (HL02806)	
Remote Control	HL03037	
Replacement Lamp / Filter	DT01931, UX41161	
Projector / Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)	

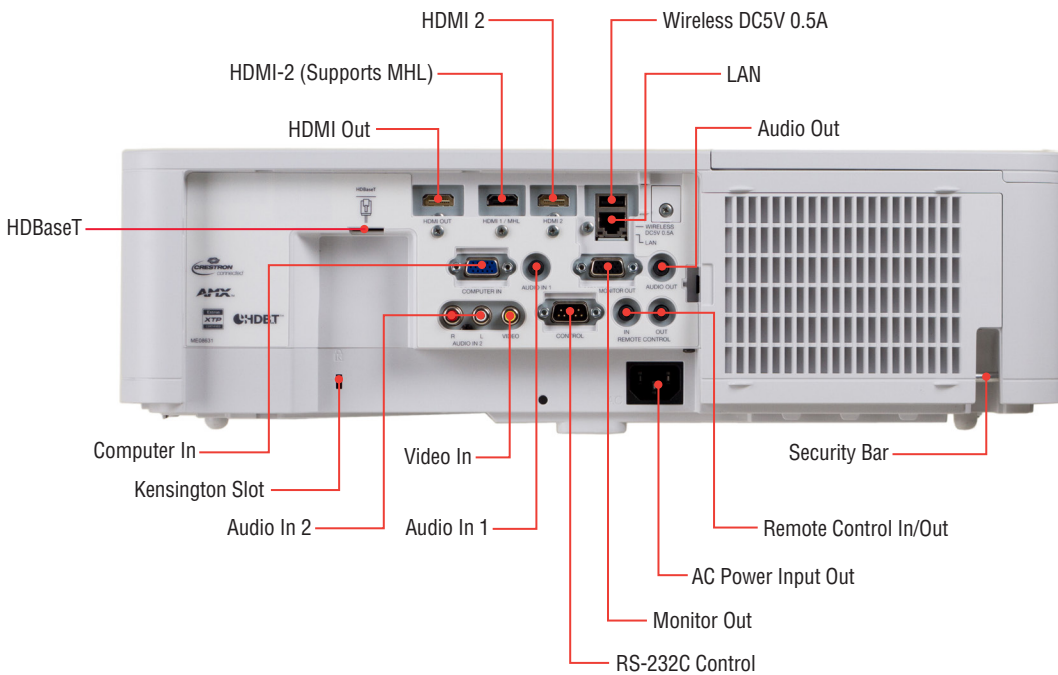

Dealer Stamp

maxell
Within, the Future

Maxell Limited
Whitebrook Park
Lower Cookham Road, Maidenhead
Berkshire, SL68YA
Tel: +44 (0)1628 585 000
Fax: +44 (0)1628 585 163
www.maxelldisplay.com

Specification and photography subject to change.