

MC-WX8751W

3LCD Projector



Introducing our latest 3LCD MC-WX8751W projector which combines all our technical expertise with our market knowledge.

This new powerful 3LCD WXGA projector is brought to market with 10,000:1 contrast ratio. The MC-WX8751W offers 7,500 ANSI lm, making it a perfect model for integrating into applications such as museums, retail and large conference rooms. With seven optional lenses to choose from and set-up for blending and warping makes it easier when using the software tool that includes colour uniformity adjustment which makes it ideal for multi projector installations.

Key Features:

WXGA 1280 x 800 resolution

7500 ANSI lumens / Colour light output

10,000:1 contrast ratio

Images up to 600" diagonal

Edge Blending and Warping

20,000hrs filter life



3 years / 6 months (for education and extended warranties please contact your local dealer)

Please note: This is a preliminary data sheet. Content, technical specifications and images are subject to change.

MC-WX8751W 3LCD Projector

Technical Specifications

| | | | |
|--|--|------------------------------------|---|
| Panel Size | 3LCD 19mm (0.75") | Security Features | PIN Security Lock, MyScreen Password Lock, Transition Detector, My Text, Password Lock, Key Lock (Key pad, Remote Control), Lens Lock |
| Panel Structure | 3LCD | On Screen Display Languages | English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese |
| Resolution | WXGA (1280 x 800) | Digital Input | HDMI x 2, HDBaseT x 1, DisplayPort x 1 |
| Light Output (Brightness) ANSI Lumens | 7500 (Normal), 6000 (Eco) | Analogue Input | 15 pin Mini D-Sub x 1, RCA Jack x1 |
| Contrast Ratio | 10,000:1 | Video Output | 15 pin Mini D-Sub x 1 |
| Light Source | Lamp | Audio Input | 3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1 |
| Lamp Life (Hours) | 2000 (Normal), 4000 (Eco) | Audio Output | RCA Jack (L/R) x 1 |
| Lens | Interchangeable, not included | RS-232C Control | 1 x 9-pin D-Sub |
| Number of colours | 16.7 million colours | Wireless LAN | USB-WL-11N wireless adapter (optional) |
| Lens Zoom | Powered Zoom x 1.7 (Standard Lens ML-713M) | Wired LAN | RJ45 connector x 1 |
| Lens Focus | Powered Focus | USB Type-A | USB Type A x 1 (wireless adapter) |
| Projection Lens F No. | 1.6 – 2.0 (using ML-713M) | Power Supply | AC 100V – 120V / AC 220V – 240V (50/60Hz) |
| Lens Shift | Motorized: Vertical 0 – +55%; Horizontal +/-10% (ML-713M) | Operating Power Consumption | 560W |
| Focus Distance | 1.2 – 22.5m (Wide), 1.9 – 38.3m (Tele) (ML-713M) | Standby Power Consumption | Less than 0.35W |
| Distance to Width Ratio/ Throw Ratio (:1) | 1.7 – 3.0 (ML-713M) | Weight | 11.1kg |
| Diagonal Display Size | 30 – 600" (FL-710M 100" – 350") | Dimensions (W x H x D) | 498 x 156 x 426mm |
| Speakers | 8W Stereo | Noise | 41dB (Normal), 33dB (Eco) |
| Digital Keystone Correction (Degrees) | Horizontal ±35°, Vertical: ±35° (ML-713M) | Filter Life (Hours) | 20,000 |
| Picture Modes | Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim | Certification | CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant |
| Picture Adjustments | ASPECT selection (Normal/4:3/16:9/16:10/14:9/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Magnify, Mirror reverse image, Up-side down image | Computer | IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+ / SXGA/ SXGA+ / WSXGA+ / UXGA/HD (Compressed), MAC16" |
| Operating Features | Accentualizer and HDCR, Auto Power Off, Auto signal search & Source skip, Blending/Cropping, Closed Caption (CC1–4, TEXT1–4) support NTSC (Video) and 480i (Component signal), Digital Keystone Correction (Horizontal: ±35 degrees, Vertical: ±35 degrees), Direct Power On, Eco Mode (Normal, Eco), Equalizing Colour temperature Adjustment, Equalizing Digital Gamma Correction, Filter timer / selectable interval time to show the message for air filter cleaning, (20,000hours is the default, Hybrid filter), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDBase-T, Image blank by RS232C/Remote control, LED lamps (Power, Lamp, Temp, Security, Filter, Shade), Lens memory (Lens shift position, Lens type), MAC address displayed on the side of projector, Magnify 4 times (WUXGA) by RS232C/Remote control, Mechanical shutter, Mirror Reverse Image, Up-side Down Image, My Button by Remote control, My Memory, My source, My Text, MyScreen, Overscan (Video, Component video signal), Perfect Fit (4 corners), capable of saving/loading the setup, Picture by Picture/Picture in Picture, Picture Freeze by RS-232C /Remote control. | Video | 525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60) |
| Network Features | AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Extron XTP system, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). ----- reference purpose only, PJLink™ Projector Management via SNMP | Supplied Accessories | Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Hole Cover x1, Adapter Cover x1, Terminal Cover x1, HDMI Cable Holder x2, Cable Tie x2 |
| | | Optional Accessories | USB wireless adapter USB-WL-11N, Wireless pen tablet TB-1, Optional Lenses: Ultra-short-throw FL-710M, Short-throw USL-701M, Short-throw FL-701M, Short-throw SL-712M, Standard-throw ML-713M, Long-throw LL-704M, Ultra-long-throw UL-705M |
| | | Remote Control | HL02805 |
| | | Replacement Lamp/Filter | DT01881M / UX40821 |
| | | Projector/ Lamp Warranty | 3 years / 6 months (for education and extended warranties please contact your local dealer) |

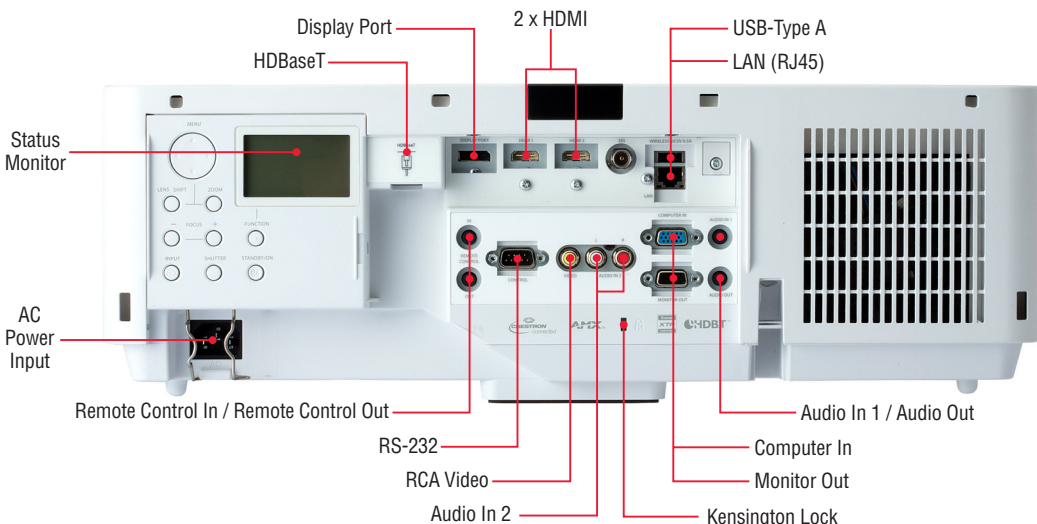


 Within, the Future
Maxell Limited
 Whitebrook Park, Lower Cookham Road,
 Maidenhead, Berkshire, UK, SL6 8YA
 Tel: +44 (0)1628 585 000
www.maxelldisplay.com
 Specification and photography subject to change.